



Project:	
Type:	
Catalog #:	

Model EB3000-TD Fluorescent Emergency Ballast with Time Delay

HOUSING

- Galvanized steel with 2' conduit on one end

ELECTRICAL

- Provides a minimum of 90 minutes of emergency illumination
- Provides a maximum lumen output of 3000 lumens
- Time delay enhancement specifically designed for programed start AC ballasts to ensure proper restrike of lamps
- AC feature designed to eliminate deterioration of lamp life
- High-temperature nickel-cadmium battery, charger and electronic circuitry
- Dual voltage 120/277 VAC operation
- Short circuit protection
- Solid-state charging indicator light
- Single-pole test switch

INSTALLATION

- For use with either switched or unswitched fixture
- Ballast may be installed inside, on top or remote from fixture
- Ballast may be remote at 1/2 distance recommended by AC ballast manufacturer (maximum 50')

BATTERY

- Ambient Temperature Rating 32°F - 122°F
- Maintenance-free sealed NiCad battery
- Maximum recharge time: 24 hours

CODE COMPLIANCE

- UL924 Listed for Damp Location
- UL Listed for retrofit/field installation
- NFPA Life Safety Code compliant
- Meets NEC and OSHA requirements

WARRANTY


- 5-year warranty



LAMP DATA

LAMP TYPE	# OF LAMPS	EB3000-TD
T5 (W)	2L	8-28
T5HO (W)	2L	35-54
T8 (W)	1L	40-215
	2L	17-40
T10 (W)	2L	17-40
T12 (W)	1L	140-215
	2L	17-40
4-PIN CFL (W)	2L	13-42
4-PIN LONG CFL (W)	1L	55
	2L	18-50
T9 CIRCLINE CFL (W)	2L	20-40
U-BEND (W) T8	2L	32, 40
U-BEND (W) T12	2L	34, 40

DIMENSIONS

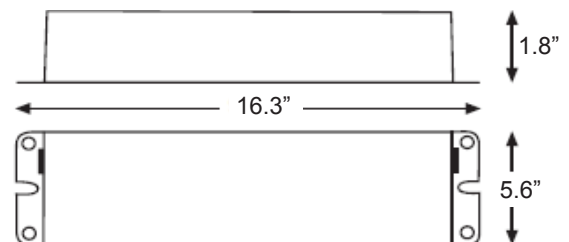

ORDERING INFORMATION

Model

EB3000-TD