



Project:	
Type:	
Catalog #:	

## Model EB650CF-4-TD Fluorescent Emergency Ballast

### HOUSING

- Galvanized steel housing

### ELECTRICAL

- Provides a minimum of 90 minutes of emergency illumination
- Provides a maximum lumen output of 750 lumens
- Time delay enhancement specifically designed for programed start AC ballasts to ensure proper restrike of lamps
- AC feature designed to eliminate deterioration of lamp life
- High-temperature nickel-cadmium battery, charger and electronic circuitry
- Dual voltage 120/277 VAC operation
- Short circuit protection
- Solid-state charging indicator light
- Single-pole test switch

### INSTALLATION

- For use with either switched or unswitched fixture
- Ballast may be installed inside, on top or remote from fixture
- Ballast may be remote at 1/2 distance recommended by AC ballast manufacturer (maximum 50')

### BATTERY

- Ambient Temperature Rating 32°F - 122°F
- Maintenance-Free Nickel-Cadmium Battery
- Maximum recharge time: 24 hours
- Charging current: 280mA
- Capacity: 9.6WH

### CODE COMPLIANCE

- UL924 Listed for Damp Location
- UL Listed for retrofit/field installation
- NFPA Life Safety Code compliant
- Meets NEC and OSHA requirements

### WARRANTY


- 5-year warranty



## LAMP DATA

LAMP TYPE	# OF LAMPS	EB500LP-TD
T5 (W)	1L	21, 28
	2L	8, 14
T5HO (W)	1L	39
T8 (W)	1L	17-40
T10 (W)	1L	17-40
T12 (W)	1L	17-40
4-PIN CFL (W)	1L	18-42
	2L	13
4-PIN LONG CFL (W)	1L	24-40
	2L	18
T9 CIRCLINE CFL (W)	1L	20-40
U-BEND (W) T8	1L	32, 40
U-BEND (W) T12	1L	34,40

## DIMENSIONS

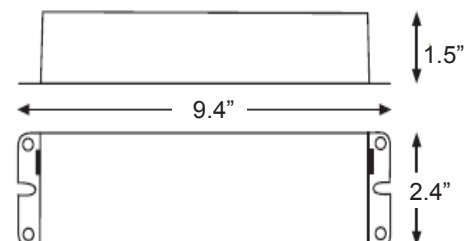

## ORDERING INFORMATION

### Model

EB650CF-4-TD