



Project:	
Type:	
Catalog #:	

Model EBT5-1300-TD

Low Profile T5 Fluorescent Emergency Ballast

HOUSING

- Low profile galvanized steel housing

ELECTRICAL

- Provides a minimum of 90 minutes of emergency illumination
- Provides a maximum lumen output of 1400 lumens
- Time delay enhancement specifically designed for programed start AC ballasts to ensure proper restrike of lamps
- AC feature designed to eliminate deterioration of lamp life
- High-temperature nickel-cadmium battery, charger and electronic circuitry
- Dual voltage 120/277 VAC operation
- Short circuit protection
- Solid-state charging indicator light
- Single-pole test switch

INSTALLATION

- For use with either switched or unswitched fixture
- Ballast may be installed inside, on top or remote from fixture
- Ballast may be remote at 1/2 distance recommended by AC ballast manufacturer (maximum 50')

BATTERY

- Ambient Temperature Rating 32°F - 122°F
- Maintenance-Free Nickel-Cadmium Battery
- Maximum recharge time: 24 hours
- Charging current: 280mA
- Capacity: 9.6WH

CODE COMPLIANCE

- UL924 Listed for damp location
- UL Listed for retrofit/field installation
- NFPA Life Safety Code compliant
- Meets NEC and OSHA requirements

WARRANTY


- 5-year warranty



LAMP DATA

LAMP TYPE	# OF LAMPS	EBT5-1300-TD
T5 (W)	1L	14-28
	2L	8
T5HO (W)	1L	39-54
T8 (W)	1L	17-40
T10 (W)	1L	17-40
T12 (W)	1L	17-40
	2L	13,18
4-PIN CFL (W)	1L	26-42
	2L	13,18
4-PIN LONG CFL (W)	1L	36-50
	2L	18-24
T9 CIRCLINE CFL (W)	1L	20-40
U-BEND (W) T8	1L	32,40
U-BEND (W) T12	1L	34,40

DIMENSIONS

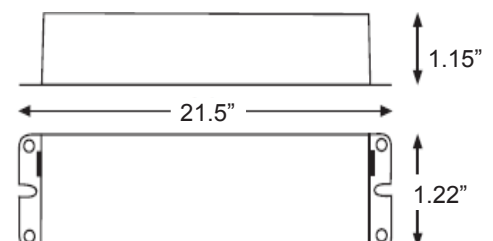

ORDERING INFORMATION

Model

EBT5-1300-TD