



Project:	
Type:	
Catalog #:	

Model EA-R Recessed Aluminum Exit

HOUSING

- Durable aluminum faceplate and trimplate
- 20 gauge steel housing and backbox
- Baked white powdercoat finish
- Removable chevrons
- Snap-fit housing and mounting plate
- Exit is suitable for indoor recessed wall mount
- Universal mounting pattern and key hole slots are stamped in backplate



ELECTRICAL

- Dual voltage 120/277VAC
- Solid state charging and switching
- Brownout protection
- Battery low voltage disconnect (LVD)
- Overload and short circuit protection
- AC power indicator and test switch

LAMPS

- High output LED lamps

BATTERY

- Maintenance-free NiCad Battery (EM)
- Battery will operate fixture for a minimum of 90 minutes in the event of a power outage
- Recharge time of the battery is 24 hours


CODE COMPLIANCE

- CSA Listed
- Meets UL Requirements

WARRANTY

- 5 year warranty

DIMENSIONS

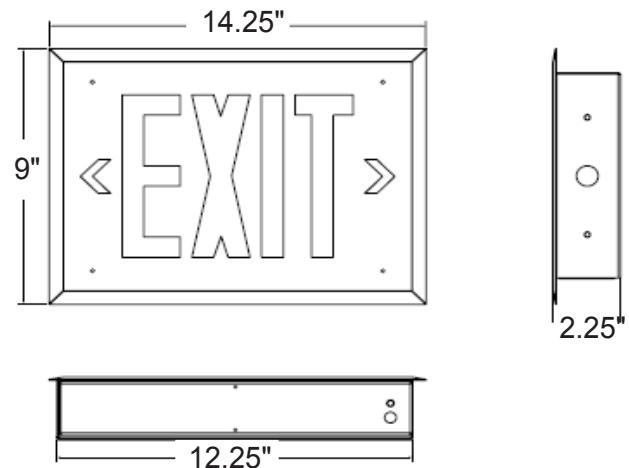

ORDERING INFORMATION

MODEL	FACE	LETTER	HOUSING	OPTIONS
EA-R	1 - Single Face	R - Red G - Green	W - White	EM - NiCad Battery SD - Self Diagnostics FA - Fire Alarm Interface IA - Intermittant Audible Alarm IV - Intermittant Visual Alarm WG - Wireguard

MODEL	FACE	LETTER	HOUSING	OPTIONS
-------	------	--------	---------	---------

Specifications and dimensions subject to change without notice.