



Project:	
Type:	
Catalog #:	

## Model EM1-LED Two Headed LED Emergency Unit

### HOUSING

- Injection molded, engineering-grade, UV-stable thermoplastic
- UL94V-0 flame rating
- Impact, scratch, fade and corrosion-resistant
- Snap-fit housing and mounting plate, can fit most standard junction boxes
- Universal mounting plate with quick-connect feature reduces installation labor
- Suitable for wall or ceiling mount
- Conduit mount knockout on top of housing
- White or black textured finish

### ELECTRICAL

- Dual voltage 120/277VAC
- Rated for use in damp locations
- Solid state charging and switching
- Brownout protection
- Battery low voltage disconnect (LVD)
- Overload and short circuit protection
- AC power indicator and test switch

### LAMPS

- Supplied with 1.5W LED heads
- 30% brighter than the standard 5.4W tungsten heads (EM-1)
- High Output (HO) option for 12-LED heads (standard 8)

### BATTERY

- Maintenance-free NiCad battery standard
- Battery will operate fixture for a minimum of 90 minutes in the event of a power outage
- RC version will operate a total of 6 Watts for a minimum of 90 minutes
- Recharge time 24 hours
- RC unit can run two extra remote heads (LED heads only)
- For remote head options, see Remote Head specsheet
- Temperature rating: 32° - 122°F

### CODE COMPLIANCE



- UL Listed for Damp Locations
- Meets UL924
- NFPA 101 Life Safety Code compliant
- NEC and OSHA compliant

### WARRANTY

- 5 year warranty



### DIMENSIONS

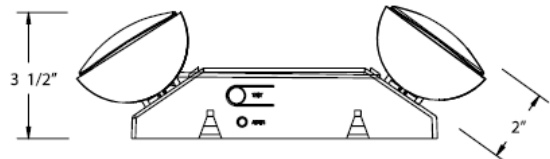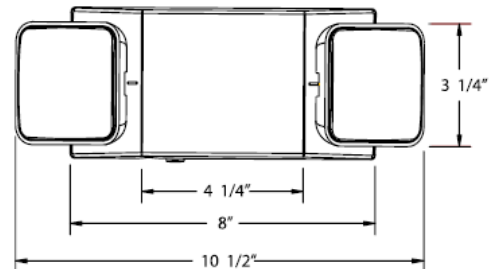

### ORDERING INFORMATION

MODEL	OPTIONS	ACCESSORIES
EM1-LED	BL - Black	WG1 - Wireguard
	RC - Remote Capable	BG2 - Bubble Guard
	SD - Self Diagnostics	
	HO - High Output	

MODEL	OPTIONS	ACCESSORIES

Specifications and dimensions subject to change without notice.