



Project:	
Type:	
Catalog #:	

## Model EX4X & EX4XC NEMA 4X Rated Exit Sign & Combo

### HOUSING

- Fully gasketed fiberglass housing and polycarbonate lens, in a gray finish
- Corrosion resistant
- NEMA 4X construction
- Field installable chevrons
- Wall, ceiling or end mount configurations available

### ELECTRICAL

- 120/277VAC input
- Solid state transfer
- Standard operating temperature: 10°C - 40°C

### LAMPS

- High intensity LED panel
- 9 watt PAR36 sealed beam standard (EX4XC)
- Heads constructed of high impact thermoplastic in black finish




### BATTERY

- Exit Only: NiCad Battery optional
- Combo: Sealed Lead Acid battery standard
- Optional battery provides a minimum of 90 minutes in the event of a power outage
- Optional 120 minute NiCad battery is available
- 24 hour recharge time
- Battery Low Voltage Disconnect (LVD)

### CODE COMPLIANCE

- ETL Listed
- Meets UL Requirements
- Nema 4X Rated
- Wet Location Rated
- Cold Environment Listed

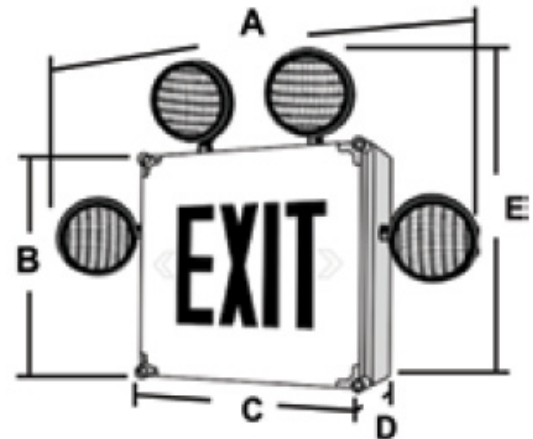

### WARRANTY

- 5 year warranty

SERIES	A	B	C	D	E
EX4X	24"	12"	12"	5"	18"

### ORDERING INFORMATION

MODEL	FACE#	FACE COLOR	HOUSING COLOR	MOUNTING	WATTAGE		OPTIONS
					(Combo Only)		
EX4X	1	R - Red	W - White	W - Wall	6V27		SD - Self Diagnostics
EX4XC (Combo)	2	G - Green		E - End	6V36		EM - Emergency Battery
				C - Ceiling	6V54		TD - Time Delay (Specify Voltage)
							IV - Intermittent Visual Alarm
							IA - Intermittent Audible Alarm
							EM120 - 120 Minute Emergency Battery
							HTR - Internal Heater - (-40°C)
							FPL - Food Prep Lens
							H* - Halogen Lamps (*Wattage)

MODEL	FACE#	FACE COLOR	HOUSING COLOR	MOUNTING	WATTAGE	OPTIONS
-	-	-	-	-	-	-

Specifications and dimensions subject to change without notice.