



Project:	
Type:	
Catalog #:	

Model CA Cast Aluminum Exit Sign

HOUSING

- Die cast aluminum housing and faceplate
- Aesthetically pleasing curved faceplate
- Easily removable chevron directional indicators
- Unique design allows double/single face conversion in field

ELECTRICAL

- Dual voltage 120/277VAC
- Solid state charging and switching
- Brownout protection
- Battery low voltage disconnect (LVD)
- Overload and short circuit protection
- AC power indicator and test switch

LAMPS

- High intensity LED panel

BATTERY

- 4.8V Maintenance-free rechargeable NiCad battery (EM model)
- Optional battery will operate fixture for a minimum of 90 minutes in the event of a power outage
- 24 hour recharge time

MOUNTING

- Aluminum mounting canopy included for top or end mount
- Universal knockout pattern on backplate for wall mount

CODE COMPLIANCE


- UL Listed for Damp Locations
- Meets NFPA Life Safety Code 101, NEC, OSHA state and local codes
- Assembled in America available

WARRANTY

- 5 year warranty

ORDERING INFORMATION

MODEL	FACE #	LETTER COLOR	HOUSING COLOR	FACE COLOR	OPTIONS
CA	1	R - Red	A - Brushed Aluminum	A - Brushed Alum	EM - NiCad Battery
	2	G - Green	B - Black	B - Black	SD - Self Diagnostics
	3 (universal)		W - White	W - White	2C - 2 Circuit Operation
					TPS - Tamper Proof Screws
					USA - Assembled in America
MODEL	FACE #	LETTER COLOR	HOUSING COLOR	FACE COLOR	OPTIONS

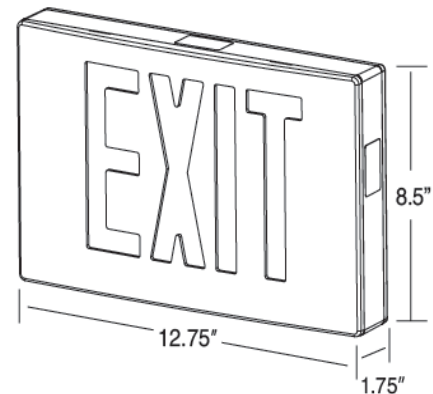

Specifications and dimensions subject to change without notice.