



Project:	
Type:	
Catalog #:	

Model XE-S Slimline Thermoplastic LED Exit Sign

HOUSING

- Low profile injection molded, engineering-grade, UV-stable thermoplastic
- Universal single and double face standard
- UL94V-0 flame rating
- Impact, scratch, fade and corrosion-resistant
- Snap-fit housing and mounting plate
- Universal mounting plate with quick-connect feature reduces installation labor
- White textured finish standard

ELECTRICAL

- Dual voltage 120/277VAC
- Wattage draw is 1W for both red and green exits
- Solid state charging and switching
- Brownout protection
- Overload and short circuit protection
- AC power indicator and test switch
- Input Watts: 0.8W

LAMPS

- High intensity LED panel

BATTERY


- Maintenance-free sealed NiCad battery (EM model)
- Standard battery will operate fixture for a minimum of 90 minutes in the event of a power outage
- 24 hour recharge time
- Battery low voltage disconnect (LVD)
- Operating Temp: 0°C - 50°C

CODE COMPLIANCE

- UL Listed for Damp Locations
- NFPA 101 Life Safety Code compliant
- NEC and OSHA compliant

WARRANTY

- 5 year warranty

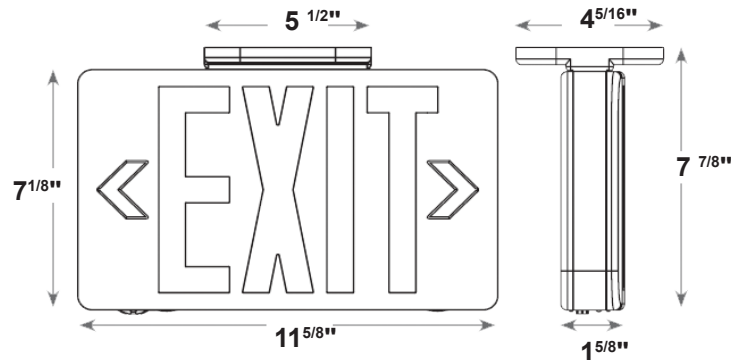

ORDERING INFORMATION

MODEL	FACE #	LETTER COLOR	FACE COLOR	BATTERY
XE-S	2 - Universal	R - Red	W - White	EM - NiCad Battery
		G - Green	B - Black	

MODEL	FACE#	LETTER COLOR	FACE COLOR	BATTERY
-------	-------	--------------	------------	---------

Specifications and dimensions subject to change without notice.

EELP • 2577 Neshaminy Interplex Dr. KOR A, Suite 102 Trevose, PA 19053 • Phone: 800-490-4496 • Fax: 877-634-6887 • www.eelp.net

XE-S 12192014